

solus

Fire Features

HALO 36 LOW MATCH LIT NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane/But.
 Gas press: 3.5" - 7.0" w.c. N/A
 BTU: 60,000 60,000

ANSI Z21.97-2014
 CSA 2.41-2014



UK & EUROPEAN SPECIFICATIONS


Product not available in UK/Euro area.

CONCRETE SPECS

Strength: 10,000 psi (proprietary)
 Weight: Top - 253 lbs / 115 kg
 Base - 77 lbs / 35 kg

JOB / ORDER
 Name or Number:

Signature & Date:

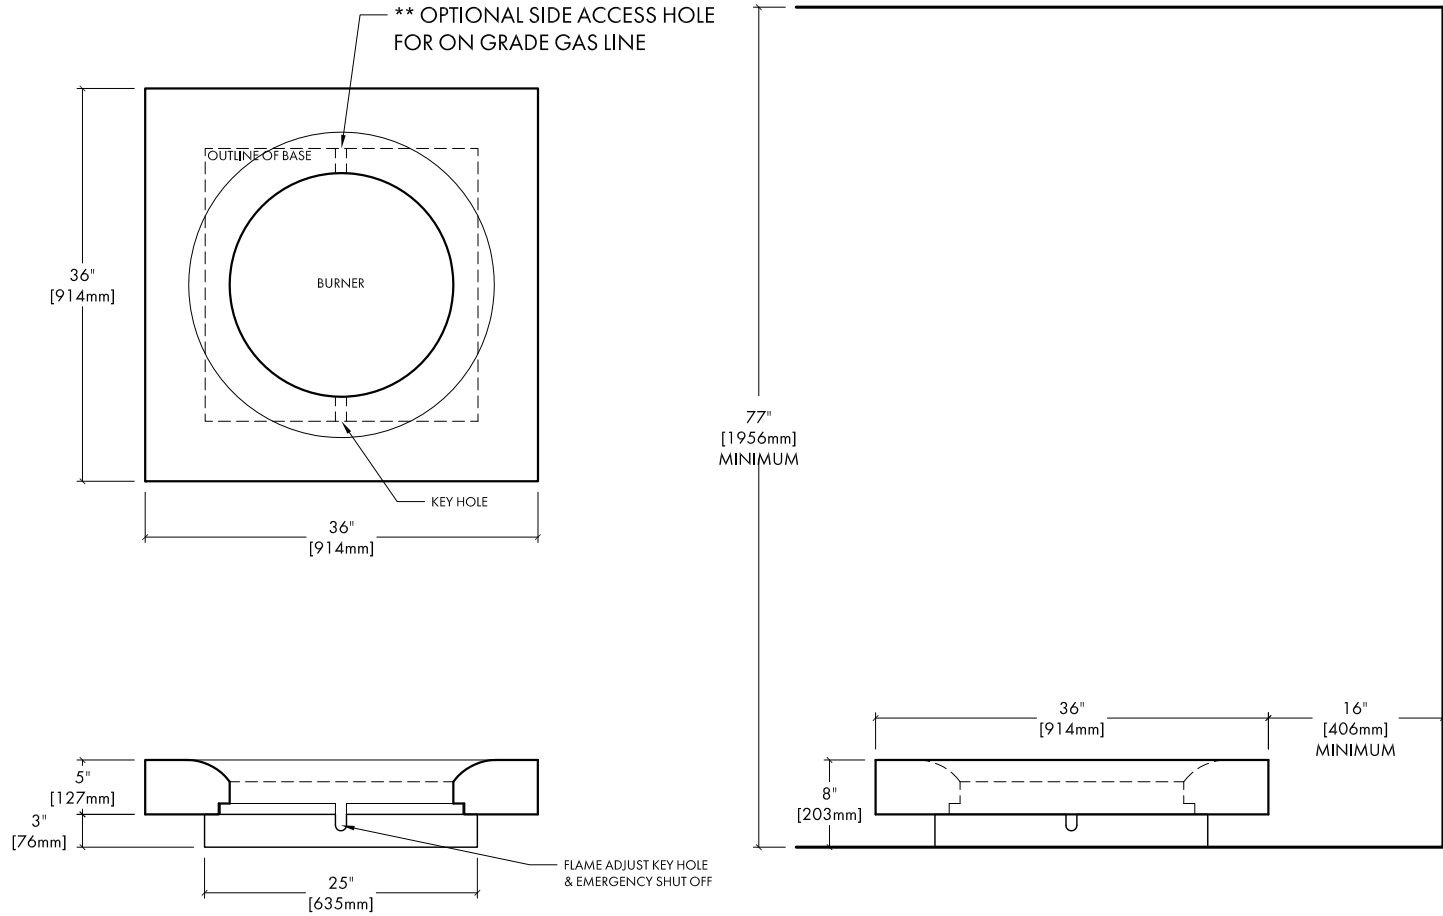

CLEARANCES to ADJACENT MATERIALS