

solus

Fire Features

LINEAR
FLAME SUPERVISION NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane
Gas press: 3.5" - 7.0" w.c. N/A
BTU: 108,000 108,000

ANSI Z21.97-2014
CSA 2.41-2014



UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: G20- 20 mbar G31- 37 mbar
Heat Out: G20/31.6 G31/31.6

EN 509:2000
EN 60335-1:2001




CONCRETE SPECS

Strength: 10,000 psi (proprietary)
Weight: 300 lbs / 136 kg
(2 slabs @ 150 lbs / 68 kg)

JOB / ORDER
Name or Number:

Signature & Date:

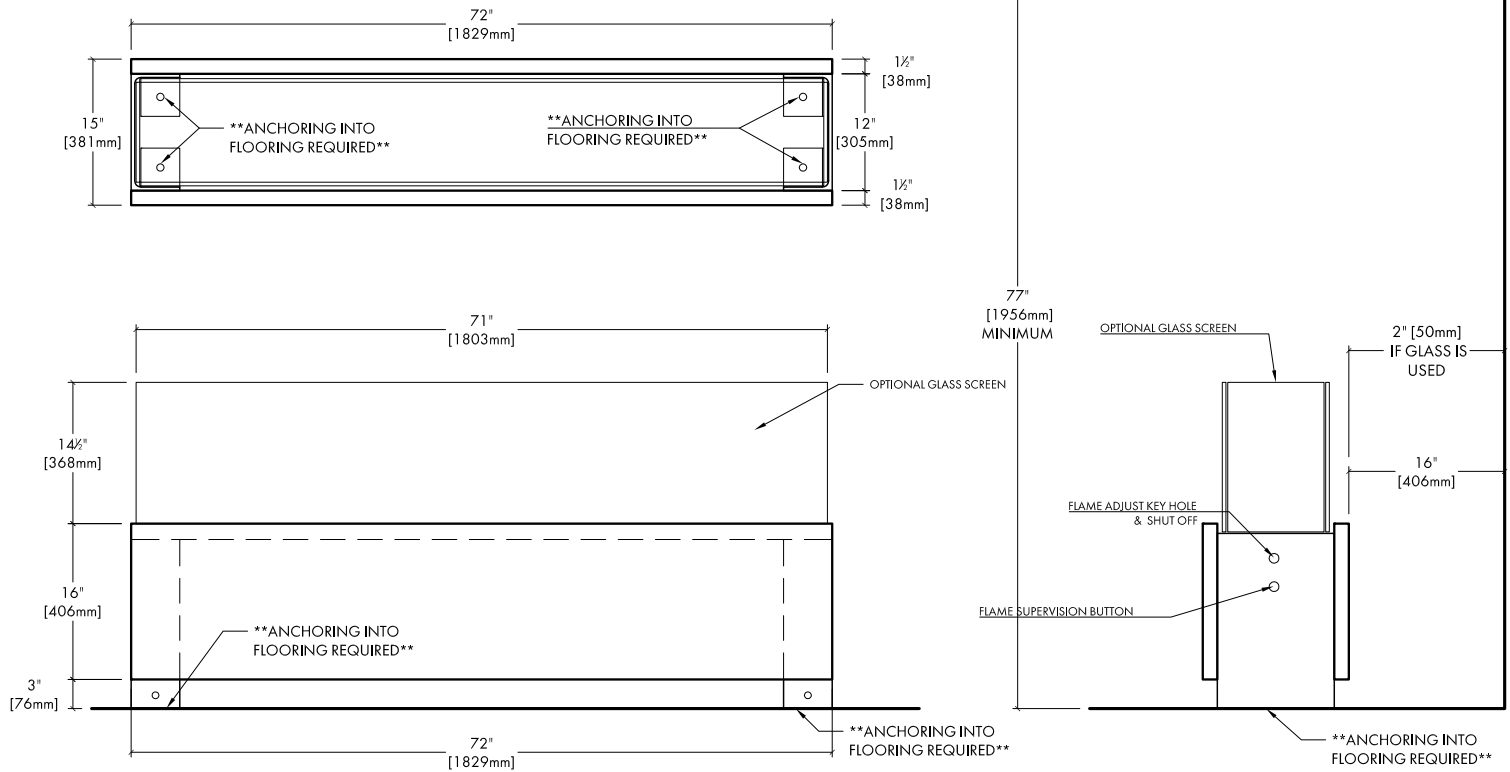

CLEARANCES to ADJACENT MATERIALS