

solus

Fire Features

LINEAR DOUBLE HIGH
FLAME SUPERVISION NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product is safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane
Gas press: 3.5" - 7.0" w.c. N/A
BTU: 108,000 108,000

MUST BE ANCHORED TO GROUND

UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.
Gas press: G20- 20 mbar G31- 37 mbar
Heat Out: G20/31.6 G31/31.6

MUST BE ANCHORED TO GROUND


CONCRETE SPECS

Strength: 10,000 psi (proprietary)
Weight: 600 lbs / 272 kg
(4 slabs @ 150 lbs / 68 kg)

JOB / ORDER

Name or Number:

Signature & Date:

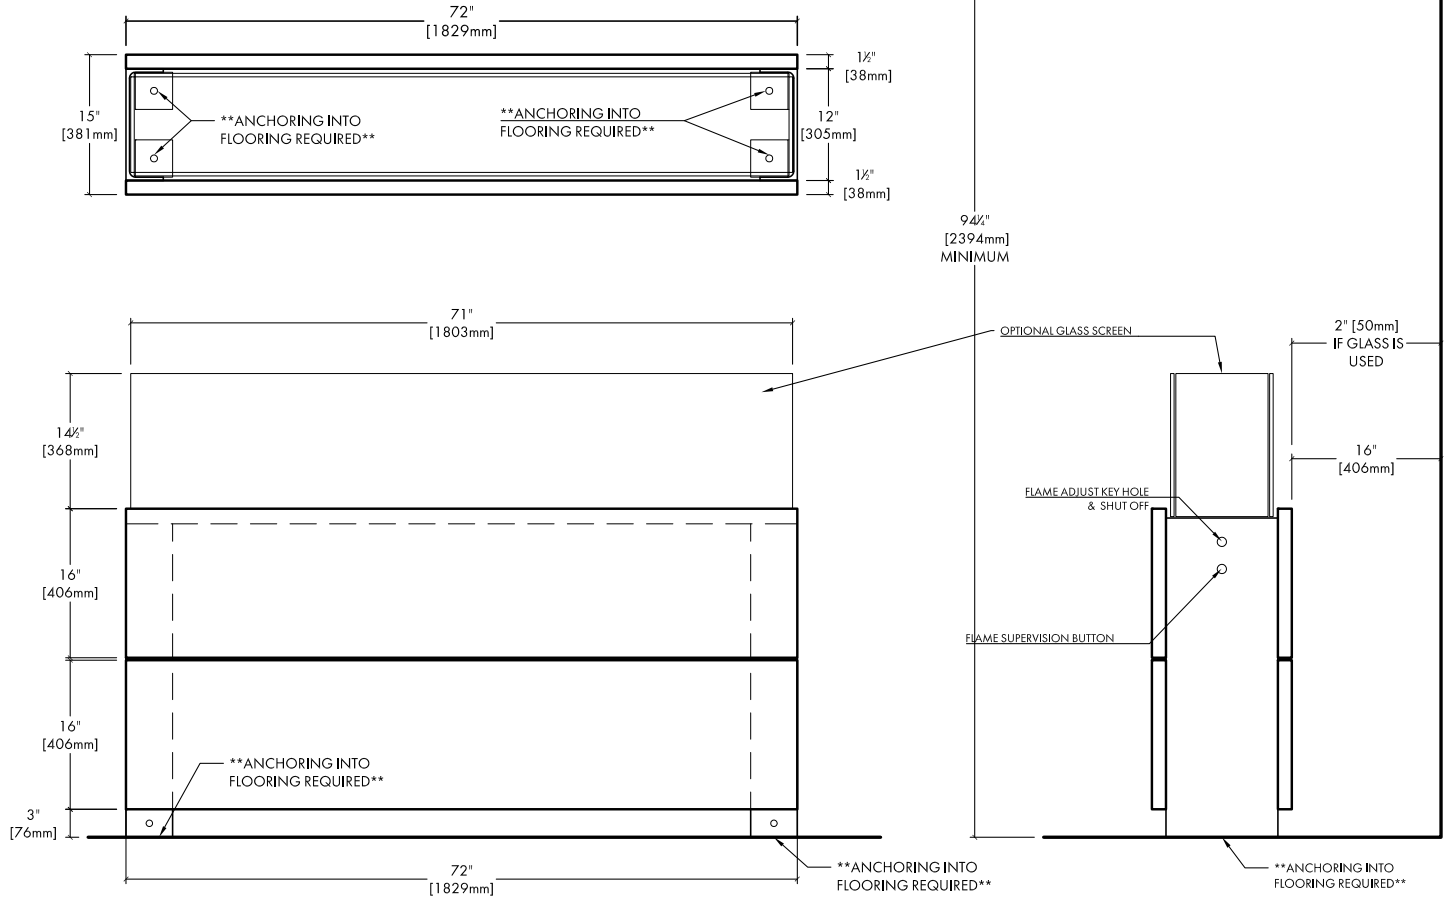

CLEARANCES to ADJACENT MATERIALS