

# solus

Fire Features

FIREBOX  
MATCH LIT NG & LP

Fire is beautiful and also dangerous if not handled properly. Please have a qualified gas fitter setup and install this product according to local codes.

This product has been tested and certified by Labtest Certification Inc. as being safe, as long as these minimum clearances to adjacent materials are maintained.

FOR OUTDOOR USE ONLY

## NORTH AMERICA SPECIFICATIONS

Gas type: Natural Gas Propane/But.  
Gas press: 3.5" - 7.0" w.c. N/A  
BTU: 73,500 73,500

ANSI Z21.97-2014  
CSA 2.41-2014



## UK & EUROPEAN SPECIFICATIONS

Gas type: Natural Gas Propane/But.  
Gas press: G20- 20 mbar G30- 30 mbar  
Heat Out: G20/21.5 G30/21.5

EN 509:2000  
EN 60335-1:2001




## CONCRETE SPECS

Strength: 10,000 psi (proprietary)  
Weight: 236 lbs / 107 kg

JOB / ORDER  
Name or Number:

Signature & Date:

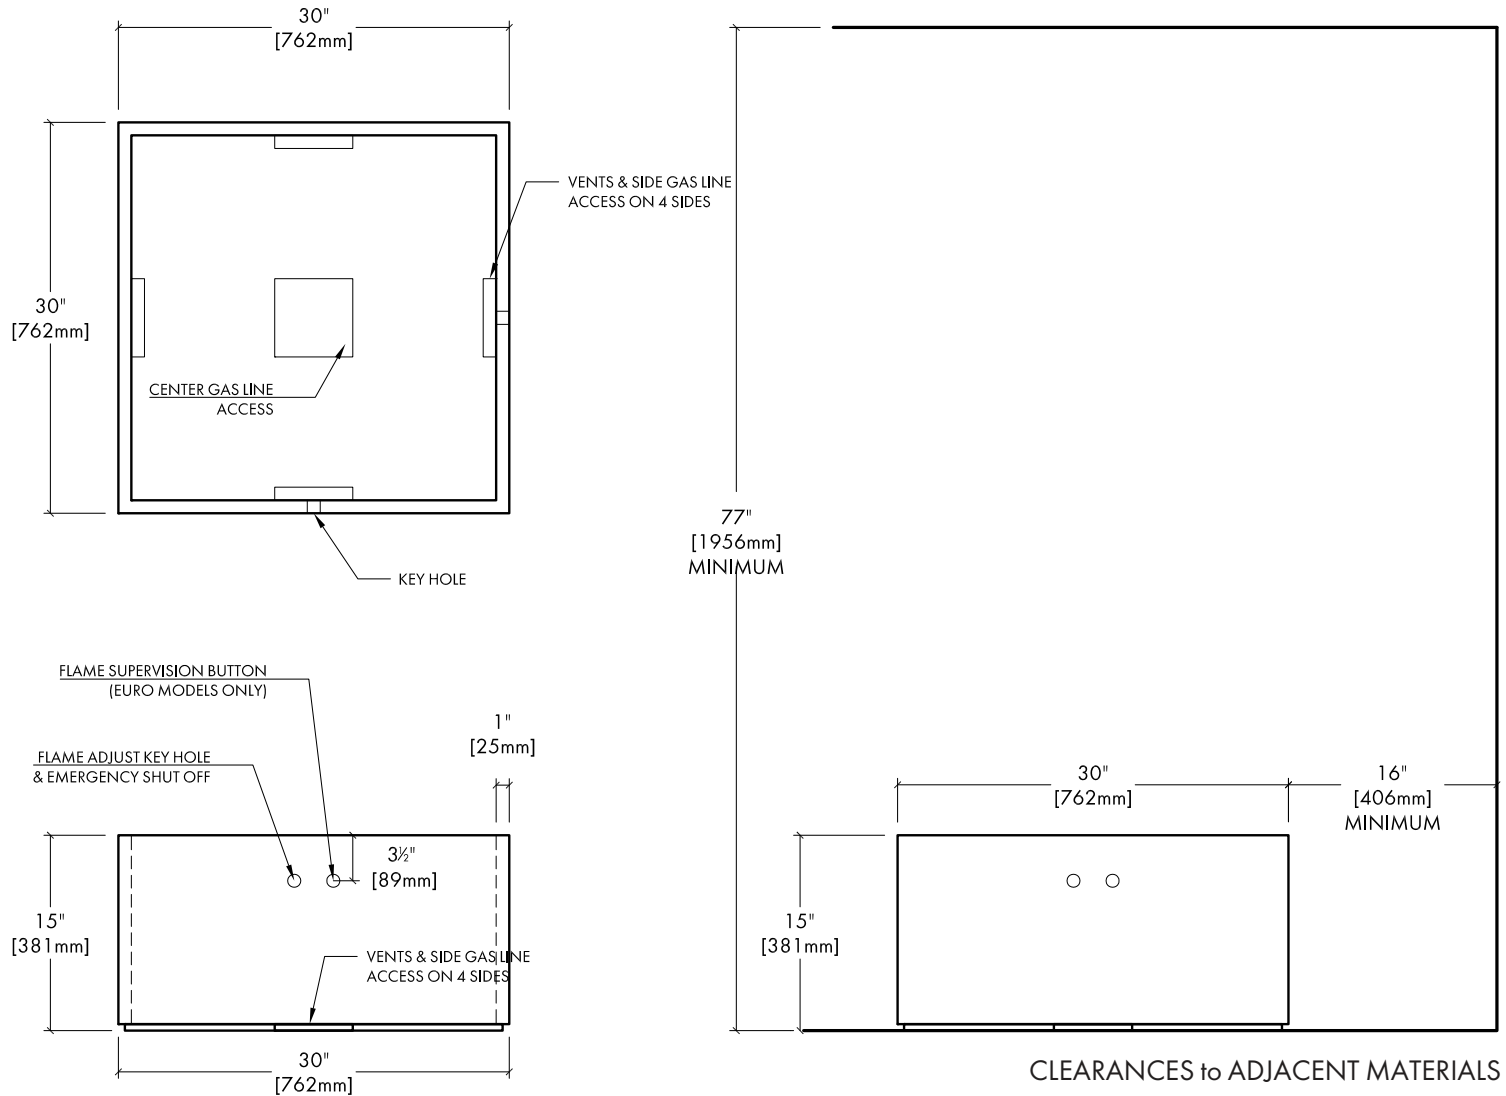

CLEARANCES to ADJACENT MATERIALS